

### Datasheet



- Made in Germany
- Multitouch
- Aluminium Silver Housing
- Ultra Compact Design, Fanless
- VESA 75 / 100

#### **PANEL**

LCD Size	21.5 inch (54.6 cm)
Resolution	1920 x 1080
Aspect Ratio	16:9
Technology	TFT
Colours	16.7M
Backlight	LED
Backlight Life Time	30,000 h
Luminance*	250 cd/m <sup>2</sup>
Contrast Ratio*	3000:1
Viewing Angle* (right/left/up/down)	89°/89°/89°
Touch	Projected Capacitive Touch, Anti-Glare,
	Multitouch

<sup>\*</sup>The values are referring to the displays only.

## STANDARD INTERFACES

USB	1 x USB Device (Type B, Touch-Control)
	2 x USB Host 2.0 (Type A)
Video	1 x DVI-D
	1 x HDMI

### **OPTIONAL INTERFACES**

USB4 x USB Host 2.0 (Type A, max. Total Current 0.5 A)




### Datasheet

## **POWER SUPPLY**

Supply Voltage24 VDC ± 20%Power Consumption (max)27 WPower ConnectorPhoenix 3-pol MC 1,5/ 3-STF-3,5 BK (screwable) /<br/>Phoenix 3-pol MC 1,5/ 3-ST-3,5 BK





**INTERFACES** 


## MECHANICAL & ENVIRONMENTAL

Housing Front	Glass, Black Frame
Housing	Aluminium / Silver
Dimensions	535.7 mm x 327.2 mm x 57 mm
Mounting	VESA MIS-D, 75, C
	VESA MIS-D, 100, C
Weight	5.5 kg
Cooling	Passive
Operating Temperature	0 ~ 50 °C
Storage Temperature	-10 ~ 70 °C
Humidity	5 ~ 80% (non condensing)
Protection Class	IP65 (IP20 rear)
Certification	CE, EN55022, EN55024, DIN EN ISO 9001




Datasheet


## **DIMENSIONS**

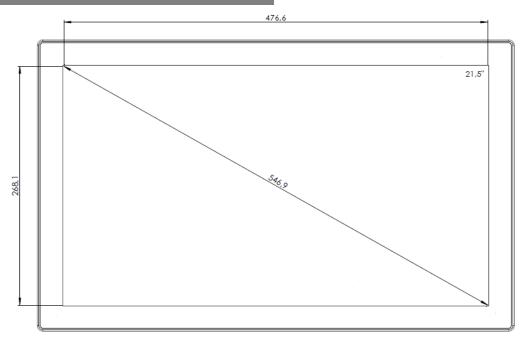

FRONT VIEW




BOTTOM VIEW

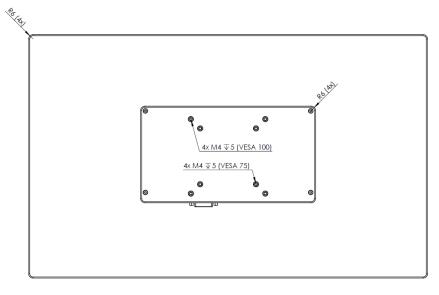

REAR VIEW

3/4




SIDE VIEW



Datasheet

### ORDERING INFORMATION



### DISCLAIMER

Technical data are subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

